


JCB offer two types of clear water submersible pump to suit two different hydraulic flow Powerpacks.

They are self priming with high power-to-weight ratio. Being hydraulically driven, they are self lubricating and maintenance free and will run dry without damage.

The bodies are manufactured from aluminium for light weight and a corrosion free life.

All pumps come with a lifting lug which allows them to be safely and accurately placed. A unique combi-seal prevents any water entering the hydraulic fluid within the pump or vice versa.

- Flat faced quick-release dripless couplings for speed of attachment change
- Lifting eye to aid placement
- Self priming for speed of use
- Supplied with 10m x2in lay flat hose
- Capable of pumping solids in suspension up to 8mm (5/16in) diameter for extra versatility

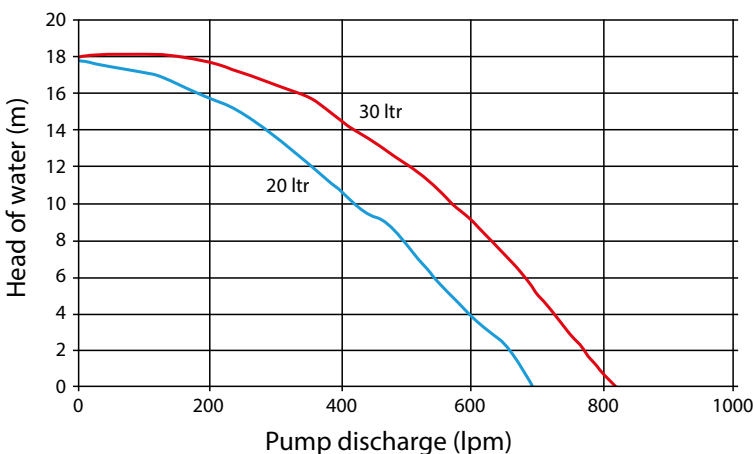

Model name	Submersible pumps	
Part number	929/03900	929/04500
Discharge port mm (in) BSP Male	50 (2)	50 (2)
Hyd. flow range lpm (UK gal/min)	0-22 (4.8)	0-32 (7)
Maximum discharge lpm (UK gal/min)	700 (154)	820 (180)
Maximum head m (ft)	18 (59)	18 (59)
Maximum operating pressure bar (psi)	138 (2000)	138 (2000)
Weight kg (lb)	8.2 (18.1)	8.5 (18.7)
Width x height mm (in)	230x302 (9.1x11.9)	230x302 (9.1x11.9)
EHTMA class	C	D

Submersible Pumps

